

ZIRKOL – C

ZIRKOL – C is a family of circular suspension lamps suitable for general and decorative lighting.

Anodized aluminium body and opal screen for a homogeneous lighting.

Available as single direct light emission version or with double light emission with high flux and different colour temperatures.

Remote driver and dimmer interface included



HOME Ø 1M | DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	45W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	2700K
Luminous flux	2616lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø100x5cm
Materials	Aluminium
Notes	included: round canopy with 1 driver WALIMLED100/24, 1x dimmer interface WDIMDALIHP, 1 electrical cable 4m, 3x adjustable metal cables (length from 3m to 0,5m). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Ceiling attachment, for metal cable Ceiling plate, for false ceiling
Net lamp weight	4 kg

Codes

BZRC1610G15DBO
BZRC1610G15DNE
BZRC1610G15DOR

Structure

white
black
matte gold


PACKAGE

Package 01 Dimension: 110x110x15 cm / Gross weight: 6,5 kg

Certificazioni



CIRCLE HOME 1-1,5m





Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

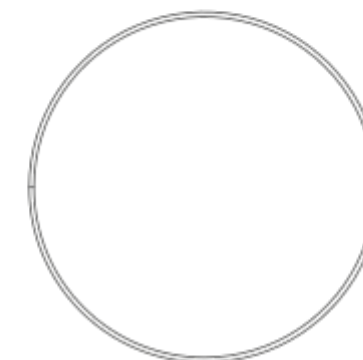

Ø 500

HOME Ø 1M | UP - DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	90W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	2700K
Luminous flux	5231lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø100x5cm
Materials	Aluminium
Notes	included: round canopy with 1 driver WALIMLED100/24, 1x dimmer interface WDIMDALIHP, 1 electrical cable 4m, 3x adjustable metal cables (length from 3m to 0,5m). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Ceiling attachment, for metal cable Ceiling plate, for false ceiling
Net lamp weight	4 kg

Codes

BZRC1710G15DBO
BZRC1710G15DNE
BZRC1710G15DOR

Structure

white
black
matte gold

PACKAGE

Package 01 Dimension: 110x110x15 cm / Gross weight: 6,5 kg

Certificazioni



CIRCLE HOME 1-1,5m




Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

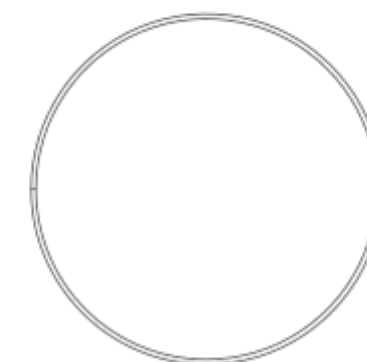

Ø 500

HOME Ø 1M | DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	45W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	3000K
Luminous flux	2769lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø100x5cm
Materials	Aluminium
Notes	included: round canopy with 1 driver WALIMLED100/24, 1x dimmer interface WDIMDALIHP, 1 electrical cable 4m, 3x adjustable metal cables (length from 3m to 0,5m). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Ceiling attachment, for metal cable Ceiling plate, for false ceiling
Net lamp weight	4 kg

Codes

BZRC1610G15WBO
BZRC1610G15WNE
BZRC1610G15WOR

Structure

white
black
matte gold


PACKAGE

Package 01 Dimension: 110x110x15 cm / Gross weight: 6,5 kg

Certificazioni



CIRCLE HOME 1-1,5m




Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

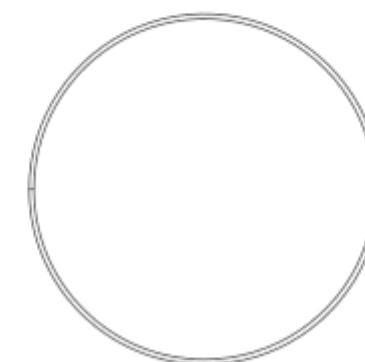

Ø 500

HOME Ø 1M | UP - DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	90W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	3000K
Luminous flux	5539lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø100x5cm
Materials	Aluminium
Notes	included: round canopy with 1 driver WALIMLED100/24, 1x dimmer interface WDIMDALIHP, 1 electrical cable 4m, 3x adjustable metal cables (length from 3m to 0,5m). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Ceiling attachment, for metal cable Ceiling plate, for false ceiling
Net lamp weight	4 kg

Codes

BZRC1710G15WBO
BZRC1710G15WNE
BZRC1710G15WOR

Structure

white
black
matte gold


PACKAGE

Package 01 Dimension: 110x110x15 cm / Gross weight: 6,5 kg

Certificazioni



CIRCLE HOME 1-1,5m




Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

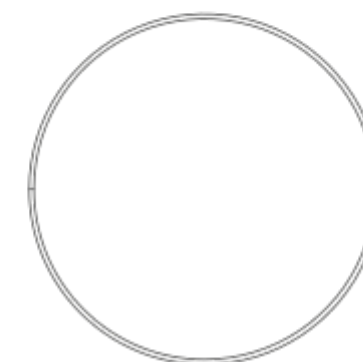

Ø 500

HOME Ø 1M | DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	45W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	4000K
Luminous flux	3077lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø100x5cm
Materials	Aluminium
Notes	included: round canopy with 1 driver WALIMLED100/24, 1x dimmer interface WDIMDALIHP, 1 electrical cable 4m, 3x adjustable metal cables (length from 3m to 0,5m). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Ceiling attachment, for metal cable Ceiling plate, for false ceiling
Net lamp weight	4 kg

Codes

BZRC1610G15NBO
BZRC1610G15NNE
BZRC1610G15NOR

Structure

white
black
matte gold


PACKAGE

Package 01 Dimension: 110x110x15 cm / Gross weight: 6,5 kg

Certificazioni



CIRCLE HOME 1-1,5m





Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

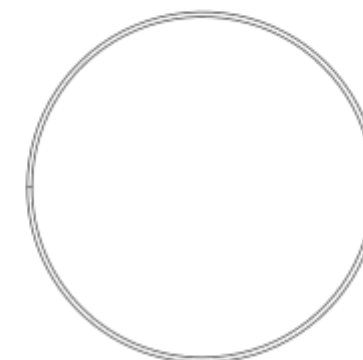

Ø 500

HOME Ø 1M | UP - DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	90W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	4000K
Luminous flux	6154lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø100x5cm
Materials	Aluminium
Notes	included: round canopy with 1 driver WALIMLED100/24, 1x dimmer interface WDIMDALIHP, 1 electrical cable 4m, 3x adjustable metal cables (length from 3m to 0,5m). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Ceiling attachment, for metal cable Ceiling plate, for false ceiling
Net lamp weight	4 kg

Codes

BZRC1710G15NBO
BZRC1710G15NNE
BZRC1710G15NOR

Structure

white
black
matte gold


PACKAGE

Package 01 Dimension: 110x110x15 cm / Gross weight: 6,5 kg

Certificazioni



CIRCLE HOME 1-1,5m




Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

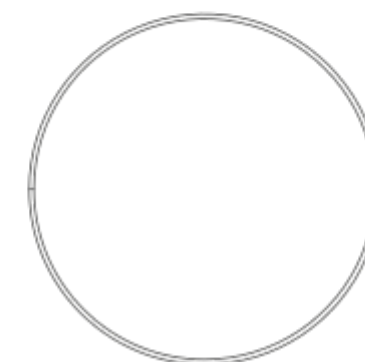

Ø 500

HOME Ø 1,5M | DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	68W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	2700K
Luminous flux	3923lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø150x5cm
Materials	Aluminium
Notes	included: round canopy with 1 driver WALIMLED100/24, 1x dimmer interface WDIMDALIHP, 1 electrical cable 4m, 3x adjustable metal cables (length from 3m to 0,5m). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Ceiling attachment, for metal cable Ceiling plate, for false ceiling
Net lamp weight	4 kg

Codes

BZRC1615G15DBO
BZRC1615G15DNE
BZRC1615G15DOR

Structure

white
black
matte gold


PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 6,5 kg

Certificazioni



CIRCLE HOME 1-1,5m




Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

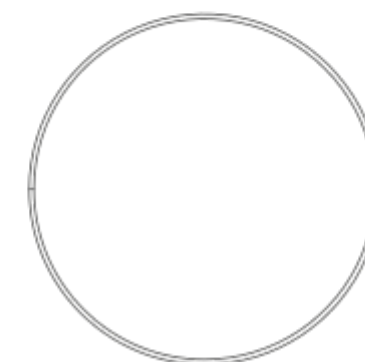

Ø 500

HOME Ø 1,5M | UP - DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	136W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	7847lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø150x5cm
Materials	Aluminium
Notes	included: round canopy with 1 driver WALIM150/24VIN, 1x dimmer interface WDIMDALIHP, 1 electrical cable 4m, 3x adjustable metal cables (length from 3m to 0,5m). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Ceiling attachment, for metal cable Ceiling plate, for false ceiling
Net lamp weight	5,4 kg

Codes

BZRC1715G15DBO
BZRC1715G15DNE
BZRC1715G15DOR

Structure

white
black
matte gold


PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 8,9 kg

Certificazioni



CIRCLE HOME 1-1,5m




Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

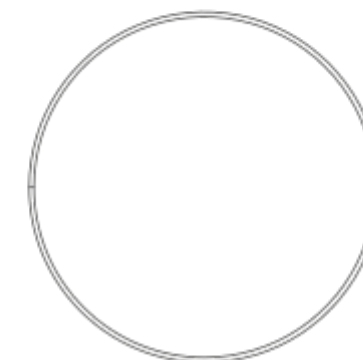

Ø 500

HOME Ø 1,5M | DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	68W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	3000K
Luminous flux	4154lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø150x5cm
Materials	Aluminium
Notes	included: round canopy with 1 driver WALIMLED100/24, 1x dimmer interface WDIMDALIHP, 1 electrical cable 4m, 3x adjustable metal cables (length from 3m to 0,5m). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Ceiling attachment, for metal cable Ceiling plate, for false ceiling
Net lamp weight	5,4 kg

Codes

BZRC1615G15WBO
BZRC1615G15WNE
BZRC1615G15WOR

Structure

white
black
matte gold


PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 8,9 kg

Certificazioni



CIRCLE HOME 1-1,5m




| Ø100/150 |


CIRCLE 2-3-5m



| Ø200 |



| Ø300 |

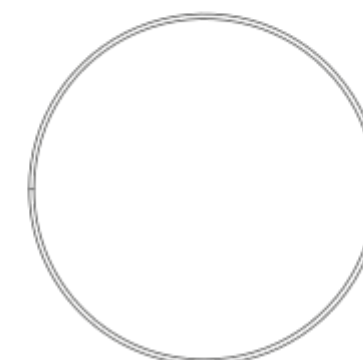

| Ø500 |

HOME Ø 1,5M | UP - DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	136W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	8308lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø150x5cm
Materials	Aluminium
Notes	included: round canopy with 1 driver WALIM150/24VIN, 1x dimmer interface WDIMDALIHP, 1 electrical cable 4m, 3x adjustable metal cables (length from 3m to 0,5m). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Ceiling attachment, for metal cable Ceiling plate, for false ceiling
Net lamp weight	5,4 kg

Codes

BZRC1715G15WBO
BZRC1715G15WNE
BZRC1715G15WOR

Structure

white
black
matte gold

PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 8,9 kg

Certificazioni



CIRCLE HOME 1-1,5m




Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

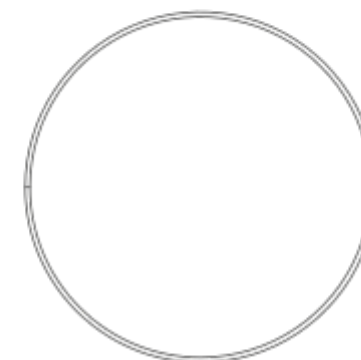

Ø 500

HOME Ø 1,5M | DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	68W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	4000K
Luminous flux	4616lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø150x5cm
Materials	Aluminium
Notes	included: round canopy with 1 driver WALIMLED100/24, 1x dimmer interface WDIMDALIHP, 1 electrical cable 4m, 3x adjustable metal cables (length from 3m to 0,5m). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Ceiling attachment, for metal cable Ceiling plate, for false ceiling
Net lamp weight	5,4 kg

Codes

BZRC1615G15NBO
BZRC1615G15NNE
BZRC1615G15NOR

Structure

white
black
matte gold


PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 8,9 kg

Certificazioni



CIRCLE HOME 1-1,5m




Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

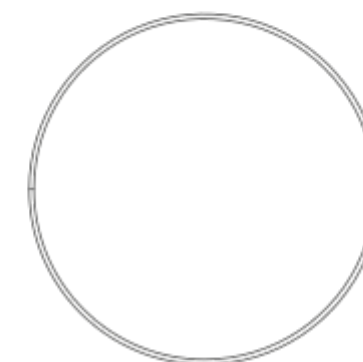

Ø 500

HOME Ø 1,5M | UP - DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	136W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	9232lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø150x5cm
Materials	Aluminium
Notes	included: round canopy with 1 driver WALIM150/24VIN, 1x dimmer interface WDIMDALIHP, 1 electrical cable 4m, 3x adjustable metal cables (length from 3m to 0,5m). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Ceiling attachment, for metal cable Ceiling plate, for false ceiling
Net lamp weight	5,4 kg

Codes

BZRC1715G15NBO
BZRC1715G15NNE
BZRC1715G15NOR

Structure

white
black
matte gold


PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 8,9 kg

Certificazioni



CIRCLE HOME 1-1,5m




| Ø100/150 |


CIRCLE 2-3-5m



| Ø200 |



| Ø300 |

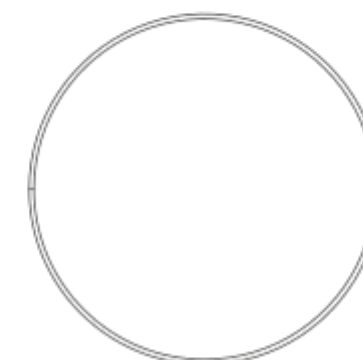

| Ø500 |

Ø 2M | DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	90W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	100/240V
Color temperature	2700K
Luminous flux	5260lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIMLED100/24, 1x dimmer interface WDIMDALIHP, 1x electrical cable 5m, 4x adjustable metal cables length 3m (including attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	7 kg

Codes

BZRC1620G15DBO
BZRC1620G15DNE
BZRC1620G15DOR

Structure

white
black
matte gold

PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 12,4 kg

Certificazioni



CIRCLE HOME 1-1,5m




Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

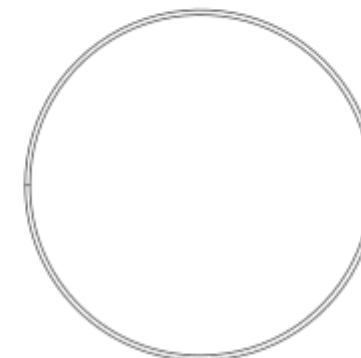

Ø 500

Ø 2M | UP - DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	180W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	10500lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1x dimmer interface WDIMDALIHP, 2x electrical cables 5m, 4x adjustable metal cables length 3m (including attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling
Net lamp weight	7,2 kg

Codes

BZRC1720G15DBO
BZRC1720G15DNE
BZRC1720G15DOR

Structure

white
black
matte gold


PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 12,6 kg

Certificazioni



CIRCLE HOME 1-1,5m




Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

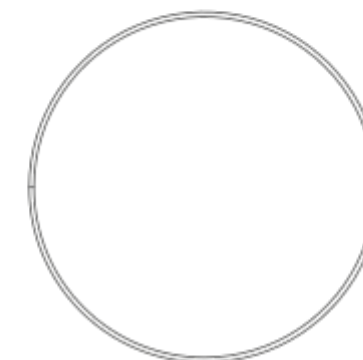

Ø 500

Ø 2M | DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	90W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	3000K
Luminous flux	5539lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIMLED100/24, 1x dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	7 kg

Codes

BZRC1620G15WBO
BZRC1620G15WNE
BZRC1620G15WOR

Structure

white
black
matte gold

PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 12,4 kg

Certificazioni



CIRCLE HOME 1-1,5m




Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

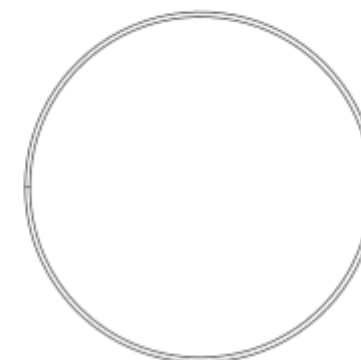

Ø 500

Ø 2M | UP - DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	180W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	11078lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1x dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling
Net lamp weight	7,2 kg

Codes

BZRC1720G15WBO
BZRC1720G15WNE
BZRC1720G15WOR

Structure

white
black
matte gold


PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 12,6 kg

Certificazioni



CIRCLE HOME 1-1,5m




Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

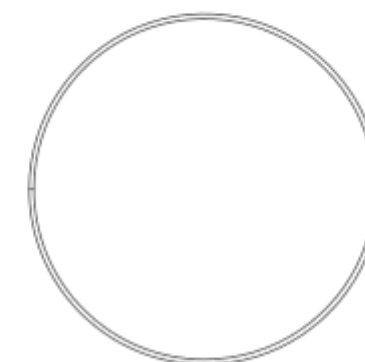

Ø 500

Ø 2M | DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	90W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	4000K
Luminous flux	6154lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIMLED100/24, 1x dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	7 kg

Codes

BZRC1620G15NBO
BZRC1620G15NNE
BZRC1620G15NOR

Structure

white
black
matte gold


PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 12,4 kg

Certificazioni



CIRCLE HOME 1-1,5m





Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

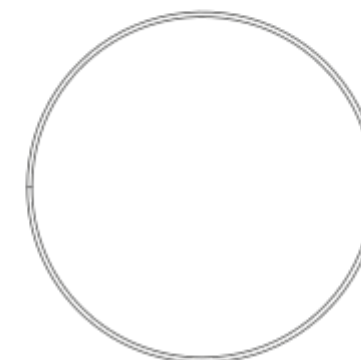

Ø 500

Ø 2M | UP - DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	180W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	12309lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1x dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling
Net lamp weight	7,2 kg

Codes

BZRC1720G15NBO
BZRC1720G15NNE
BZRC1720G15NOR

Structure

white
black
matte gold

PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 12,6 kg

Certificazioni



CIRCLE HOME 1-1,5m




Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

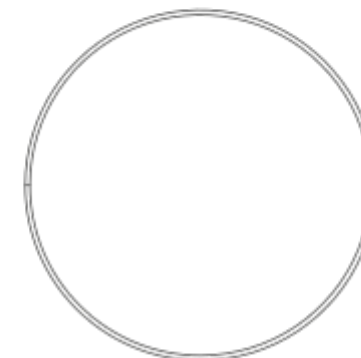

Ø 500

Ø 3M | DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	134W
Emission	Diffused orientable
Switching	1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	7820lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø300x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1x dimmer interface WDIMDALIHP, 1 electrical cable 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 3 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Ceiling plate, for false ceiling
Net lamp weight	9,8 kg

Codes

BZRC1630G15DBO
BZRC1630G15DBO
BZRC1630G15DOR

Structure

white
black
matte gold


PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 17,8 kg

Certificazioni



CIRCLE HOME 1-1,5m




Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

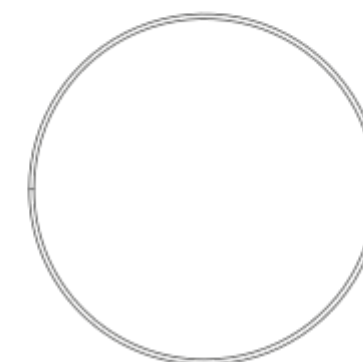

Ø 500

Ø 3M | UP - DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	268W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	2700K
Luminous flux	15640lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø300x5cm
Materials	Aluminium
Notes	included: 3 drivers WALIMLED100/24, 3x dimmer interface WDIMDALIHP, 3x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 3 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Ceiling plate, for false ceiling
Net lamp weight	12,3 kg

Codes

BZRC1730G15DBO
BZRC1730G15DNE
BZRC1730G15DOR

Structure

white
black
matte gold

PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 20,3 kg

Certificazioni



CIRCLE HOME 1-1,5m




| Ø100/150 |


CIRCLE 2-3-5m



| Ø200 |



| Ø300 |

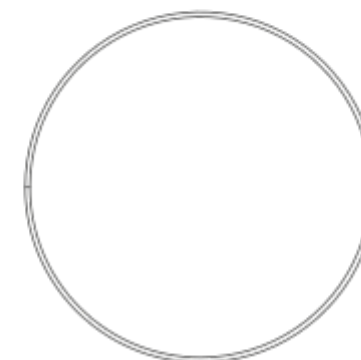

| Ø500 |

Ø 3M | DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	134W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	8238lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø300x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1x dimmer interface WDIMDALIHP, 1 electrical cable 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 3 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Ceiling plate, for false ceiling
Net lamp weight	9,8 kg

Codes

BZRC1630G15WBO
BZRC1630G15WNE
BZRC1630G15WOR

Structure

white
black
matte gold


PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 17,8 kg

Certificazioni



CIRCLE HOME 1-1,5m





Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

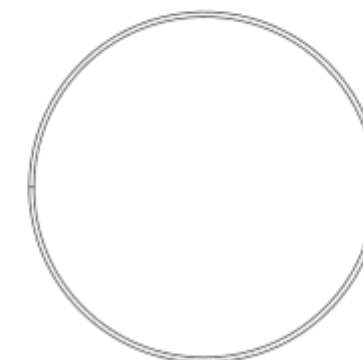

Ø 500

Ø 3M | UP - DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	268W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	3000K
Luminous flux	16476lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø300x5cm
Materials	Aluminium
Notes	included: 3 driver WALIMLED100/24, 3x dimmer interface WDIMDALIHP, 3 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 3 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Ceiling plate, for false ceiling
Net lamp weight	12,3 kg

Codes

BZRC1730G15WBO
BZRC1730G15WNE
BZRC1730G15WOR

Structure

white
black
matte gold


PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 20,3 kg

Certificazioni



CIRCLE HOME 1-1,5m





| Ø100/150 |


CIRCLE 2-3-5m



| Ø200 |



| Ø300 |

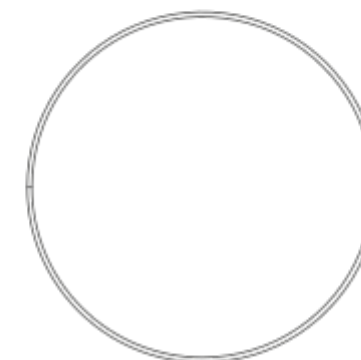

| Ø500 |

Ø 3M | DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	134W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	9153lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø300x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1x dimmer interface WDIMDALIHP, 1 electrical cable 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 3 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Ceiling plate, for false ceiling
Net lamp weight	9,8 kg

Codes

BZRC1630G15NBO
BZRC1630G15NNE
BZRC1630G15NOR

Structure

white
black
matte gold

PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 17,8 kg

Certificazioni



CIRCLE HOME 1-1,5m





| Ø100/150 |


CIRCLE 2-3-5m



| Ø200 |



| Ø300 |

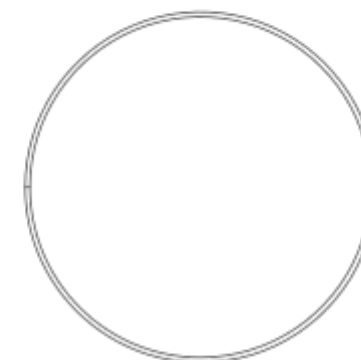

| Ø500 |

Ø 3M | UP - DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	268W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	4000K
Luminous flux	18306lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø300x5cm
Materials	Aluminium
Notes	included: 3 driver WALIMLED100/24, 3x dimmer interface WDIMDALIHP, 3 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 3 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Ceiling plate, for false ceiling
Net lamp weight	12,3 kg

Codes

BZRC1730G15NBO
BZRC1730G15NNE
BZRC1730G15NOR

Structure

white
black
matte gold


PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 20,3 kg

Certificazioni



CIRCLE HOME 1-1,5m





| Ø100/150 |


CIRCLE 2-3-5m



| Ø200 |



| Ø300 |

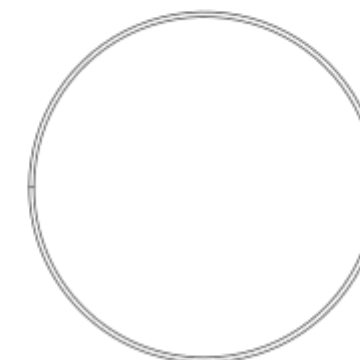

| Ø500 |

Ø 5M | DOWNLIGHT -2700K

LAMPING

Source	Linear LED
Total power	226W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	13100lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø500x5cm
Materials	Aluminum
Notes	included: 1x driver WALIM250W24VIN, 1x dimmer interface WDIMDALIHP, 2 electrical cables 5m, 10x adjustable metal cables length 3m (including ceiling attachment). Shipped in 5 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling
Net lamp weight	15,9 kg

Codes

BZRC1650G15DBO
BZRC1650G15DNE
BZRC1650G15DOR

Structure

white
black
matte gold


PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 23,9 kg

Certificazioni



CIRCLE HOME 1-1,5m




Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

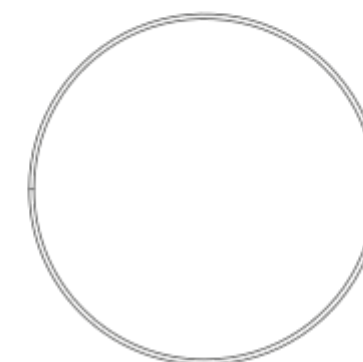

Ø 500

Ø 5M | UP - DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	452W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	26100lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø500x5cm
Notes	included: 5x driver WALIM120W24VIN, 5x dimmer interface WDIMDALIHP, 5 electrical cables 5m, 10x adjustable metal cables length 3m (including ceiling attachment). Shipped in 5 pieces
Accessories	Canopy, for concrete ceiling Ceiling plate, for false ceiling
Net lamp weight	20,3 kg

Codes

BZRC1750G15DBO
BZRC1750G15DNE
BZRC1750G15DOR

Structure

white
black
matte gold


PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 28,3 kg

Certificazioni



CIRCLE HOME 1-1,5m




Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

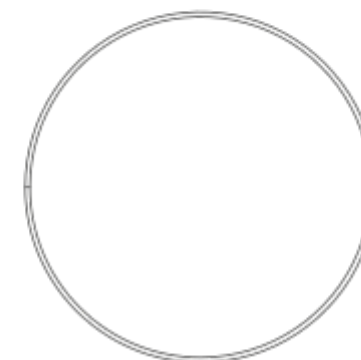

Ø 500

Ø 5M | DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	226W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	13847lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø500x5cm
Materials	Aluminium
Notes	included: 1x driver WALIM250W24VIN, 1x dimmer interface WDIMDALIHP, 2 electrical cables 5m, 10x adjustable metal cables length 3m (including ceiling attachment). Shipped in 5 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling
Net lamp weight	15,9 kg

Codes

BZRC1650G15WBO
BZRC1650G15WNE
BZRC1650G15WOR

Structure

white
black
matte gold


PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 23,9 kg

Certificazioni



CIRCLE HOME 1-1,5m




Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

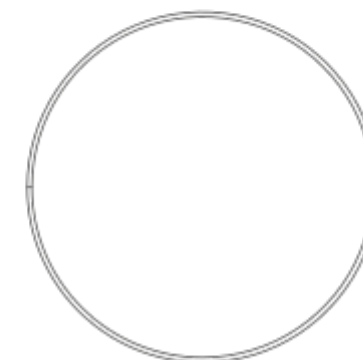

Ø 500

Ø 5M | UP - DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	452W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	27695lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø500x5cm
Materials	Aluminium
Notes	included: 5x driver WALIM120W24VIN, 5x dimmer interface WDIMDALIHP, 5 electrical cables 5m, 10x adjustable metal cables length 3m (including ceiling attachment). Shipped in 5 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Ceiling plate, for false ceiling
Net lamp weight	20,3 kg

Codes

BZRC1750G15WBO
BZRC1750G15WNE
BZRC1750G15WOR

Structure

white
black
matte gold

PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 28,3 kg

Certificazioni



CIRCLE HOME 1-1,5m




| Ø100/150 |


CIRCLE 2-3-5m



| Ø200 |



| Ø300 |

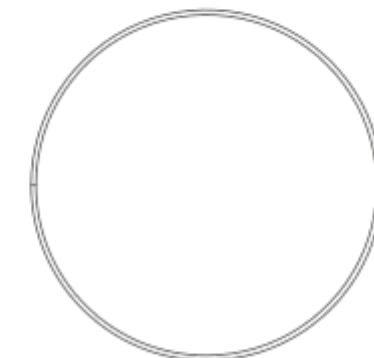

| Ø500 |

Ø 5M | DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	226W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	15386lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø500x5cm
Materials	Aluminium
Notes	included: 1x driver WALIM250W24VIN, 1x dimmer interface WDIMDALIHP, 2 electrical cables 5m, 10x adjustable metal cables length 3m (including ceiling attachment). Shipped in 5 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling
Net lamp weight	15,9 kg

Codes

BZRC1650G15NBO
BZRC1650G15NNE
BZRC1650G15NOR

Structure

white
black
matte gold


PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 23,9 kg

Certificazioni



CIRCLE HOME 1-1,5m




Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

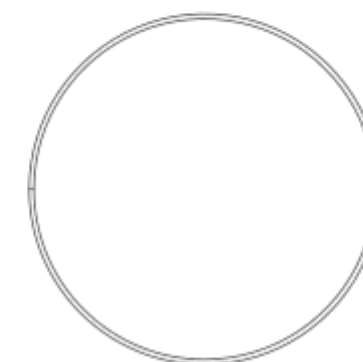

Ø 500

Ø 5M | UP - DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	452W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	30772lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	ø500x5cm
Materials	Aluminium
Notes	included: 5x driver WALIM120W24VIN, 5x dimmer interface WDIMDALIHP, 5 electrical cables 5m, 10x adjustable metal cables length 3m (including ceiling attachment). Shipped in 5 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling Ceiling plate, for false ceiling
Net lamp weight	20,3 kg

Codes

BZRC1750G15NBO
BZRC1750G15NNE
BZRC1750G15NOR

Structure

white
black
matte gold


PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 28,3 kg

Certificazioni



CIRCLE HOME 1-1,5m





Ø 100/150


CIRCLE 2-3-5m



Ø 200



Ø 300

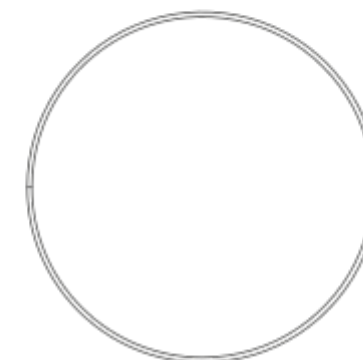

Ø 500